

Spartan-25® (NSP-25/E)

Addressable FACP

With Built-in Communicator



Addressable Fire Alarm Control Panels

General

The NOTIFIER Spartan-25 (NSP-25/NSP-25E) is a 25 point addressable Fire Alarm Control Panel (FACP) with built-in Digital Alarm Communicator Transmitter (DACT). This control panel supports up to 25 addressable devices in any combination of detectors and modules. With simple programming, operation on standard wire, and features such as drift compensation and maintenance alert, the Spartan-25 is a preferred alternative to conventional control panels in both new and retrofit applications.

The JumpStart® (or auto-learn) feature and easy-to-set code-wheel addressing of Honeywell Fire Systems detectors and modules enable the system to be configured for fire protection without a programming utility. The default programming can be modified using the panels embedded web server.

The integral DACT transmits system status (alarms, troubles, supervisories, etc.) to a remote monitoring location via the public switched telephone network. Reporting formats are contact ID, SIA 8 or SIA 20.

NOTE: Unless otherwise specified, the term Spartan-25 is used in this data sheet to refer to the Spartan-25 and the Spartan-25E. For details on the Canadian version, see DN-60640.



Features

- ETL listed to ANSI/UL 864 9th Edition Standard
- Listed to UL Standard 864, Ninth edition.
- JumpStart® auto-learn feature reduces installation time and makes programming easy.
- Built-in digital communicator.
- Two programmable Style Y (Class B) notification appliance circuits (NACs).
- Selectable strobe synchronization for System Sensor®, Gentex®, Wheelock® or AMSECO devices.
- Two programmable Form-C relays and one Form-C trouble relay.
- Automatic detector sensitivity testing (NFPA 72 compliant).
- Drift compensation.
- Alarm verification per zone of detectors.
- Walk-test.
- Maintenance alert region.
- Uses standard wire (unshielded or twisted pair).
- Custom programming performed through the control panel's built-in browser; no programming software is required.
- Fire Zones

SLC Communication

- Single addressable SLC loop which meets NFPA Style 4 (Class B) requirements.
- 25 addressable device capacity (any combination of addressable detectors and modules).
- Compatible with Honeywell Fire Systems detectors and modules.

Notification Appliance Circuits (NACS)

- Two independently programmable output circuits. Circuits can be configured for the following outputs:
 - Style Y (Class B).
 - Door Holder Service (cannot be used for notification appliances).
 - Aux Power Source (cannot be used for notification appliances).
- Silence Inhibit and Auto-silence timer options.
- Continuous or Temporal code.
- Selectable strobe synchronization per NAC.
- Up to 2.0 A total output power, 1.0 A for auxiliary power and door holder. Each circuit can source up to the total system current 2.0 A.

Programming and Software

- Auto-learn “JumpStart®” feature for easy programming reduces installation time.
- Custom programming can be performed through control panel's built-in browser.

User Interface

LED INDICATORS

- AC Power (green)
- Fire Alarm (red)
- Supervisory (yellow)
- Alarm Silenced (yellow)
- System Trouble (yellow)
- Disabled (yellow)
- Low Battery Fault (yellow)
- Ground Fault (yellow)
- Walk Test (yellow)

KEYPAD CONTROLS

- Acknowledge
- Silence
- Drill
- System Reset (lamp test)

- Disable per zone
- Disable per NAC
- JumpStart

Product Line Information

NSP-25: 25 point addressable fire alarm control panel. Includes main circuit board, chassis, backbox and door. Black; 120 VAC.


NSP-25E: Same as **NSP-25**, but operates from 220/240 VAC.

NSP-25C: Same as **NSP-25**, but listed for Canadian applications. For details on the Canadian version, see DN-60640.

HONEYWELL FIRE SYSTEMS DEVICES

HFS-P: Honeywell Fire Systems addressable photoelectric smoke detector. Includes base.

HFS-PT: Honeywell Fire Systems addressable photoelectric smoke detector with thermal sensor. Includes base.

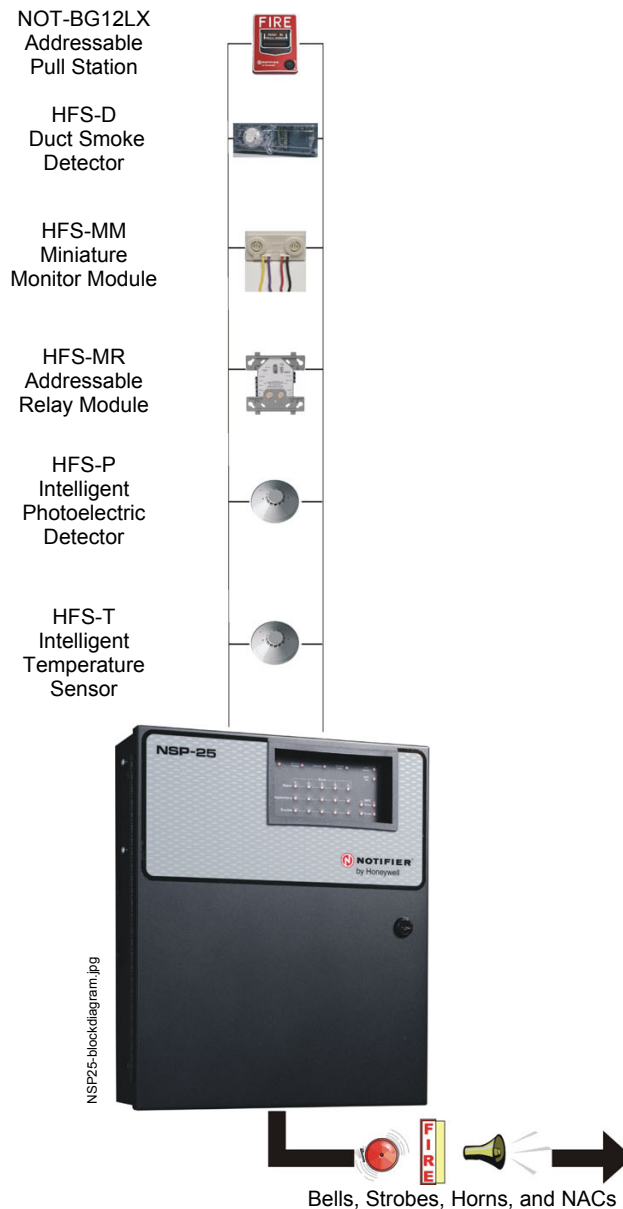

HFS-T: Honeywell Fire Systems addressable fixed temperature heat detector. Includes base.

HFS-MM: Honeywell Fire Systems addressable Mini-Monitor module for normally-open contact devices.

HFS-MR: Honeywell Fire Systems addressable relay module.

HFS-D: Honeywell Fire Systems addressable photoelectric duct smoke detector. Includes detector.

NOT-BG12LX: Addressable dual-action manual pull station.

BB-26: Battery backbox, holds up to two 25 AH batteries and CHG-75.

NFS-LBB: Battery box, houses two 55 AH batteries.

CHG-75: Battery charger for lead-acid batteries with a rating of 25 to 75 AH.

CHG-120: Remote battery charging system for lead-acid batteries with a rating of 55 to 120 AH. Requires additional NFS-LBB for mounting.

BAT Series: Batteries. See data sheet DN-6933.

005220: City Box Transmitter Module.

007860: DACT Phone Cord (2 required)

Wiring Requirements

While shielded wire is not required, it is recommended that all SLC wiring be twisted-pair to minimize the effects of electrical interference. Refer to the panel manual for wiring details.

SYSTEM SPECIFICATIONS

System Capacity

- Intelligent Signalling Line Circuits..... 1
- Addressable device capacity 25
- Programmable software zones 5

Electrical Specifications

- **AC Power:** NSP-25: 120 VAC, 60 Hz, 1.5 A. NSP-25E: 230 VAC, 50/60 Hz, 0.75 A. AC wire size is minimum 14 AWG (2.00 mm²) with 600 V insulation. Nonpower-limited, supervised.
- **Battery:** Charging capacity 7-33 AH (18 AH for ULC applications). NSP-25 cabinet holds maximum of two 7 AH batteries. Larger batteries require a separate battery cabinet, such as the **BB-26 or NFS-LBB**.
- **Communication Loop:** Supervised and power-limited.
- **Notification Appliance Circuits:**
 - Terminal Strip provides connections for two NACs, Style Y (Class B).
 - Maximum signaling current: 2.0 A.
 - End-of-Line Resistor: 4.7 kOhm, ½ watt (P/N 71252 UL listed) for Style Y (Class B) NAC. Refer to the NSP-25 manual for listed compatible devices.
- **Standby Current:** 135 mA
- **Alarm Current:** 220 mA
- **Aux Power Circuits:** 1.0A @ 24 VDC per circuit, power-limited
- **Two Programmable Relays and One Fixed Trouble Relay:**
 - Contact rating: 2.5 A @ 24 VDC (resistive).
 - Form-C relays, nonpower-limited, nonsupervised.

Physical Specifications

- **Dimensions:** 15.2" H (38.42 cm) x 12.75" W (32.39 cm) x 3.4" D (8.57 cm)
- **Weight:** 11.5 lbs. (5.2 kg)
- **Color:** Black

Temperature and Humidity Ranges

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

Agency Listings and Approvals

The listings and approvals below apply to the basic NSP-25(E) control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S635
- **ETL listed:** Report # 3189837NYM-001a
- **CSFM:** 7165-0028:0263

For the ULC-listed version, see DN-60640.

NFPA Standards

The NSP-25(E) complies with the following NFPA 72 Fire Alarm Systems requirements:

- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **REMOTE STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (Where a DACT is not accepted, the alarm, trouble and supervisory relays may be connected to UL 864 listed transmitters).
- **PROPRIETARY** (Automatic, Manual and Waterflow).
- **CENTRAL STATION** (Automatic, Manual and Waterflow, and Sprinkler Supervised).

JumpStart®, NOTIFIER®, and System Sensor® are registered trademarks of Honeywell International Inc.
©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com